

DC150 BASIC PLUS

I JUST WANT TO PUMP FUEL
- AND FAST

The **Basic Plus package** is for the client who wants extra flow for faster re-fuelling. This package features the Piusi E120 Italian pump system with an impressive flow rate of 100LPM, high-quality Donaldson filter and a mechanical display for easy recording of fuel pumped. This is a high-value yet economical choice for customers and at a price point that is of an advantage.

WHAT ARE THE BENEFITS FOR YOUR BUSINESS?



Space Saver

The compliant DC Series tanks are double-skinned and boast a secure, lockable, full height pump cabinet to ensure safety of your equipment and provide a deterrent from would-be thieves.



Saves Money

You decide how much you pay for fuel through picking a fuel distributor of your choice who will provide you costs well below that of the service stations.



Minimise Downtime

The 'Basic-Plus' options allows fast refuelling. The fast-flow Italian Piusi pump can deliver up to 100 litres per minute which is approximately three time faster than your standard service station.



Stop Fuel Theft

Fuel theft is a big problem nationwide. The 'tri-latch' systems ensures that the full height access door can be securely locked each night preventing would be fuel thieves.




Low Maintenance

The innovative design of the DC Series tanks means no internal bracing (no safety risks) and simple condensation catchment and recovery.



Save Time

An average of 300* hours is saved for our customers annually. (*based on 15 minutes per fill). Just refuel and you're ready for tomorrow.

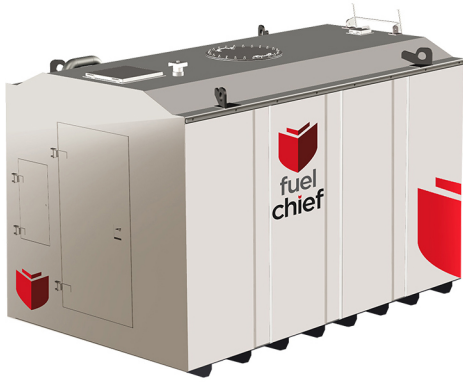

The **DC150** tank is a popular option for small to medium sized businesses who have over 10 pieces of machinery or vehicles they need to fill. This model doesn't take up much room and is perfect for fast refuelling onsite.

- 🔧 15,000L model with large secure cabinet to house all pumps and equipment
- 🔧 Full height access door with 3-way locking system and anti-levering design for extra security
- 🔧 Cabinet has access hatch through roof to allow safe servicing of tank vent
- 🔧 Hempel C4-High Marine grade paint system
- 🔧 Lockable access door to fuel management terminal, switching and dry-break coupling
- 🔧 Spill sump in cabinet base to contain spillage
- 🔧 Improved inner tank design with no internal bracing
- 🔧 Sloped floor in inner tank for better water catchment and recovery
- 🔧 Water inspection and suction port housed under lockable hatch
- 🔧 Large access manhole for maintenance and inspection of inner tank
- 🔧 Extra feed and return ports for running auxiliary equipment
- 🔧 Offset fill pipe with Todo Dry-Break coupling for rapid refueling
- 🔧 Lockable fill point with integrated dipstick
- 🔧 1100 LPM rated & approved overfill prevention valve for safe filling and prevention of accidents
- 🔧 Base of tank sealed in an anti-rust underseal

Dimensions (mm) (W x L x H)

2320 x 3925 x 2550

Capacity (Total)

15,000 Litres

Capacity (SFL)

14,329 Litres

Design Approval

TNK 16006

Design Standard

AS1692

Weight (Empty)

3405 Kg

COMPONENTS:



DELIVERY HOSE OPTIONS:



HOSE



HOSE REEL



HOSE TOWER

DC150BAP6M

Fuelchief DC150 Diesel Tank (14,329 SFL) with 100LPM High Flow Pump Kit, Flow Meter, 6m Hose & Auto Nozzle

DC150BAP10H

Fuelchief DC150 Diesel Tank (14,329 SFL) with 100LPM High Flow Pump Kit, Flow Meter, 10m Hose Reel & Auto Nozzle

DC150BAP15H

Fuelchief DC150 Diesel Tank (14,329 SFL) with 100LPM High Flow Pump Kit, Flow Meter, 15m Hose Reel & Auto Nozzle

DC150BAPHT

Fuelchief DC150 Diesel Tank (14,329 SFL) with 100LPM High Flow Pump Kit, Flow Meter, 3m Hose Tower with 7m Hose & Auto Nozzle