



DC25 BASIC

ONSITE REFUELLING MADE EASY

The **Basic package** has got everything needed for the client who 'just wants to pump fuel' quickly and with no fuss. This package features a proven 230v Italian Piusi bowser pump system with a mechanical display for easy recording of fuel pumped. A no complex, ready-to-use package, The DC25 Basic package is a great economical choice and at a price that comes in well under budget!

WHAT ARE THE BENEFITS FOR YOUR BUSINESS?



Space Saver

The DC25 footprint is so compact, it fits in half a car parking space; ideal for businesses who are after a compact and out of the way solution.



Saves Money

Having a depot tank will save you money on every litre of fuel and prevent unnecessary extra purchases from service stations.



Save Time

Onsite fuel will reduce refuelling labour time by 100's of hours per year. No more waiting in queues to refuel or to pay. Just refuel on site and you're ready for tomorrow.



Greater Control

It's never been a better time to get your business costs under control and being in control of your fuel costs makes sense.



Low Maintenance

The innovative design of the DC Series tanks means no internal bracing (no safety risks) and simple condensation catchment and recovery.



Easy Refuelling

Open the cabinet and lift the nozzle to activate the pump making it very easy to fill up your diesel-powered machinery without delays.



The **DC25** is excellent for smaller operations or as a back-up tank for generators and pumps. The DC25 tank also has unique features of 110% secondary containment and a full height internal pump cabinet.

This model comes complete with tank vent, contents gauge and dipstick. The sloping floor and water suction port ensures easy water catchment and removal. Below are some of the key features of this tank:

- 🔴 2,500L model with large secure cabinet to house all pumps and equipment
- 🔴 Full height access door with 3-way locking system and anti-theft design for extra security
- 🔴 Hempel C4-High Marine grade paint system
- 🔴 Spill sump in cabinet base to contain spillage
- 🔴 Improved inner tank design with no internal bracing for safe servicing
- 🔴 Sloped floor in inner tank for better water catchment and recovery
- 🔴 Water inspection and suction port housed under lockable hatch
- 🔴 Large access manhole for maintenance and inspection of inner tank
- 🔴 Extra feed and return ports for running auxiliary equipment
- 🔴 Lockable fill point with integrated dipstick
- 🔴 Base of tank sealed in an anti-rust underseal

Dimensions (mm) (W x L x H)

1160 x 2586 x 1600

Capacity (Total)

2,500 Litres

Capacity (SFL)

2,370 Litres

Design Approval

100111-0016142

Design Standard

AS1692


Weight (Empty)

950 Kg

COMPONENTS:



DELIVERY HOSE OPTIONS:

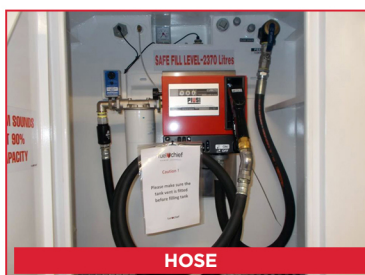

HOSE



HOSE REEL

DC25BAS6M

Fuelchief DC25 Diesel Tank (2,370 SFL) 56LPM High Flow Pump Kit, Flow Meter, 4m Hose & Auto Nozzle

DC25BAS10H

Fuelchief DC25 Diesel Tank (2,370 SFL) with 56LPM High Flow Pump Kit, Flow Meter, 10m Hose Reel & Auto Nozzle

DC25BAS15H

Fuelchief DC25 Diesel Tank (2,370 SFL) with 56LPM High Flow Pump Kit, Flow Meter, 15m Hose Reel & Auto Nozzle